
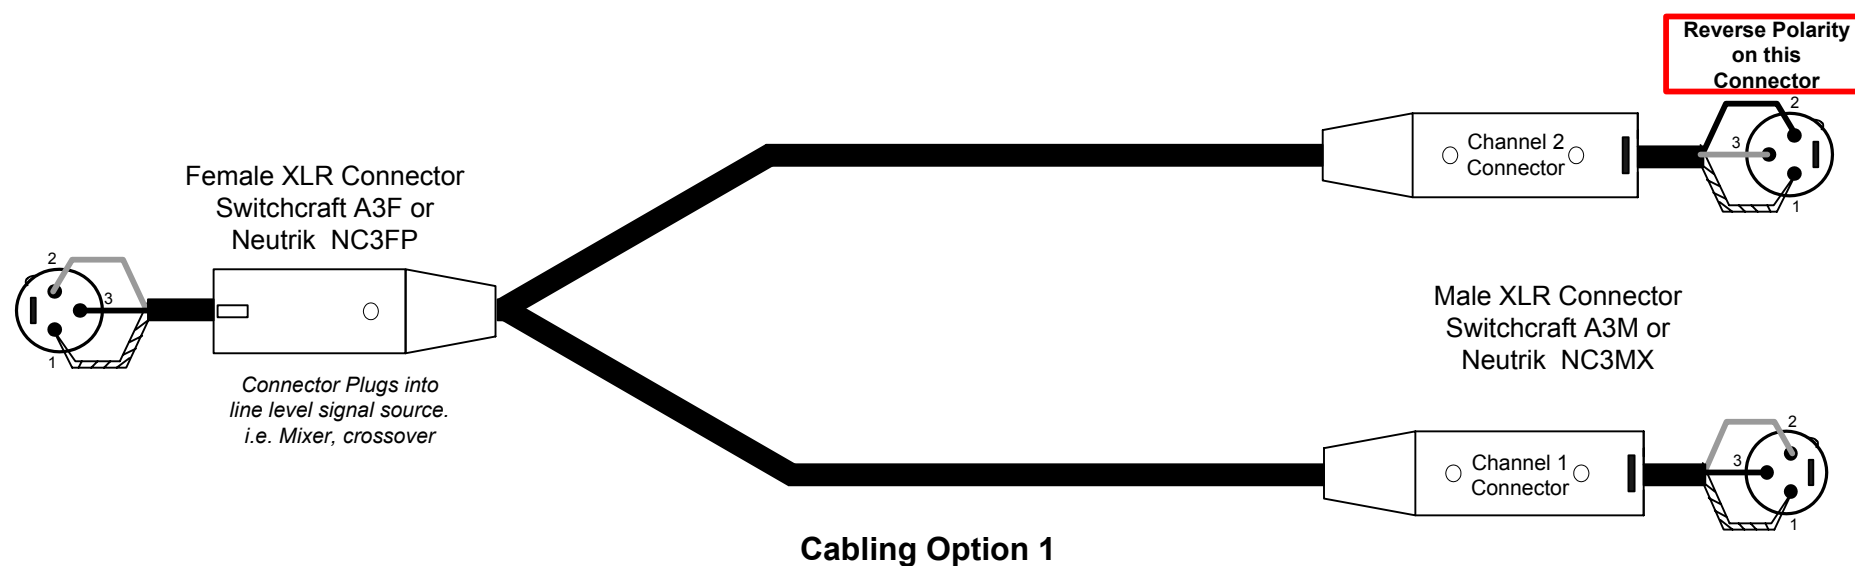


Bridge-Mono "Y" Input Cable

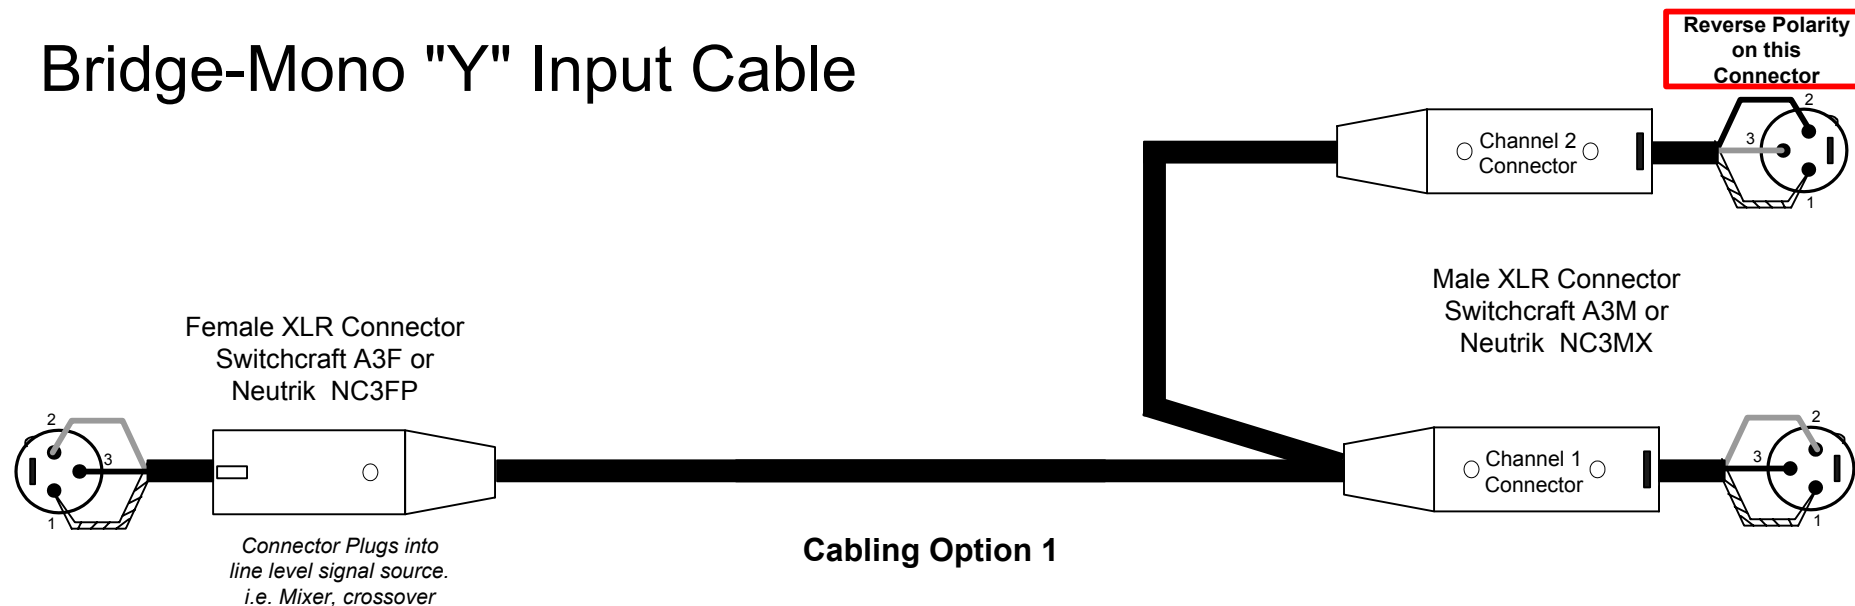

NOTE: For the XLS amplifier to operate in Bridge-Mono mode a custom "Y" input cable will need to be made with the wires for pins 2 and 3 on the Channel 2 input connector swapped. The input attenuator knobs should also be set to the same position.