


Type : KTL four prong US-Style twist mount

RoHS Compliant

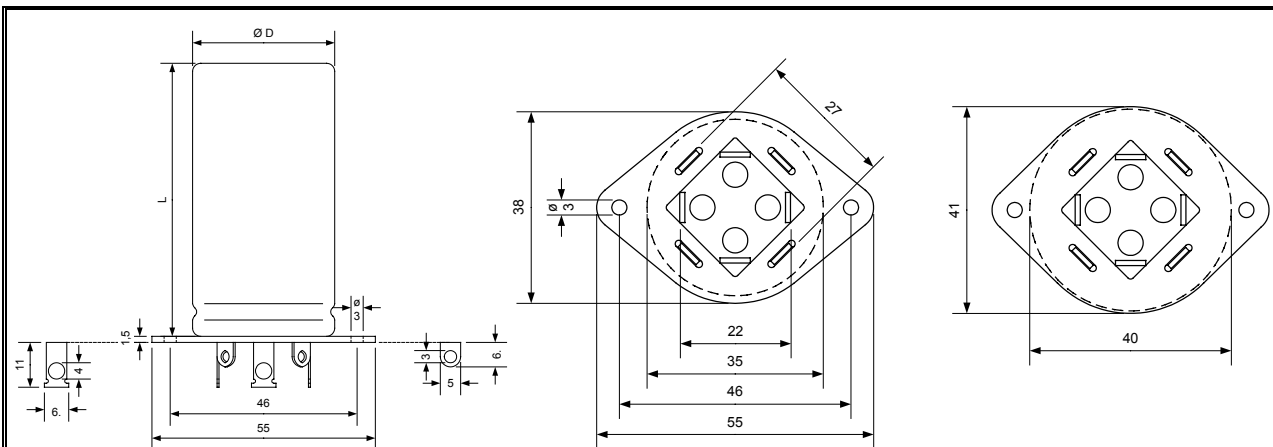

Electrical Parameters

Reverse Voltage (U _R) max. 1 s	2 V				
Tolerance	-10 / +30 %				
ESL typ.	20 nH				
Leakage Current (I _L) U _R / 5 min / 20 °C	0,006 * C _R [μF] * U _R [V] [μA]				
	Rated Capacitance (C _R) 100 Hz / 20 °C [μF]	Rated Voltage (U _R) [V]	Tan δ typ. 100 Hz / 20°C [%]	D [mm]	L [mm]
KTL 10	2000 / 2000	35	20	35	55
KTL 3	250	250	10	35	70
KTL 9	50 / 50 / 50 / 50	500	8	40	60
KTL 25	80 / 40 / 30 / 20			35	98
	80 / 40 / 20	550	8		
	30	525	8		
KTL 13	30 / 20 / 20 / 20	550	8	35	88
KTL 14	40 / 40 / 20 / 20	550	8	40	60

Useful life
as a function of ambient temperature and actual ripple current

