




AGUILAR OBP-3 WIRING DIAGRAM

WITH BLEND, VOLUME CONTROL, AND STACKED TONE POT

MID. SELECT
Switch closed = 400 Hz
Switch open = 800 Hz
DPDT, ON-ON

OBP-3 MODULE

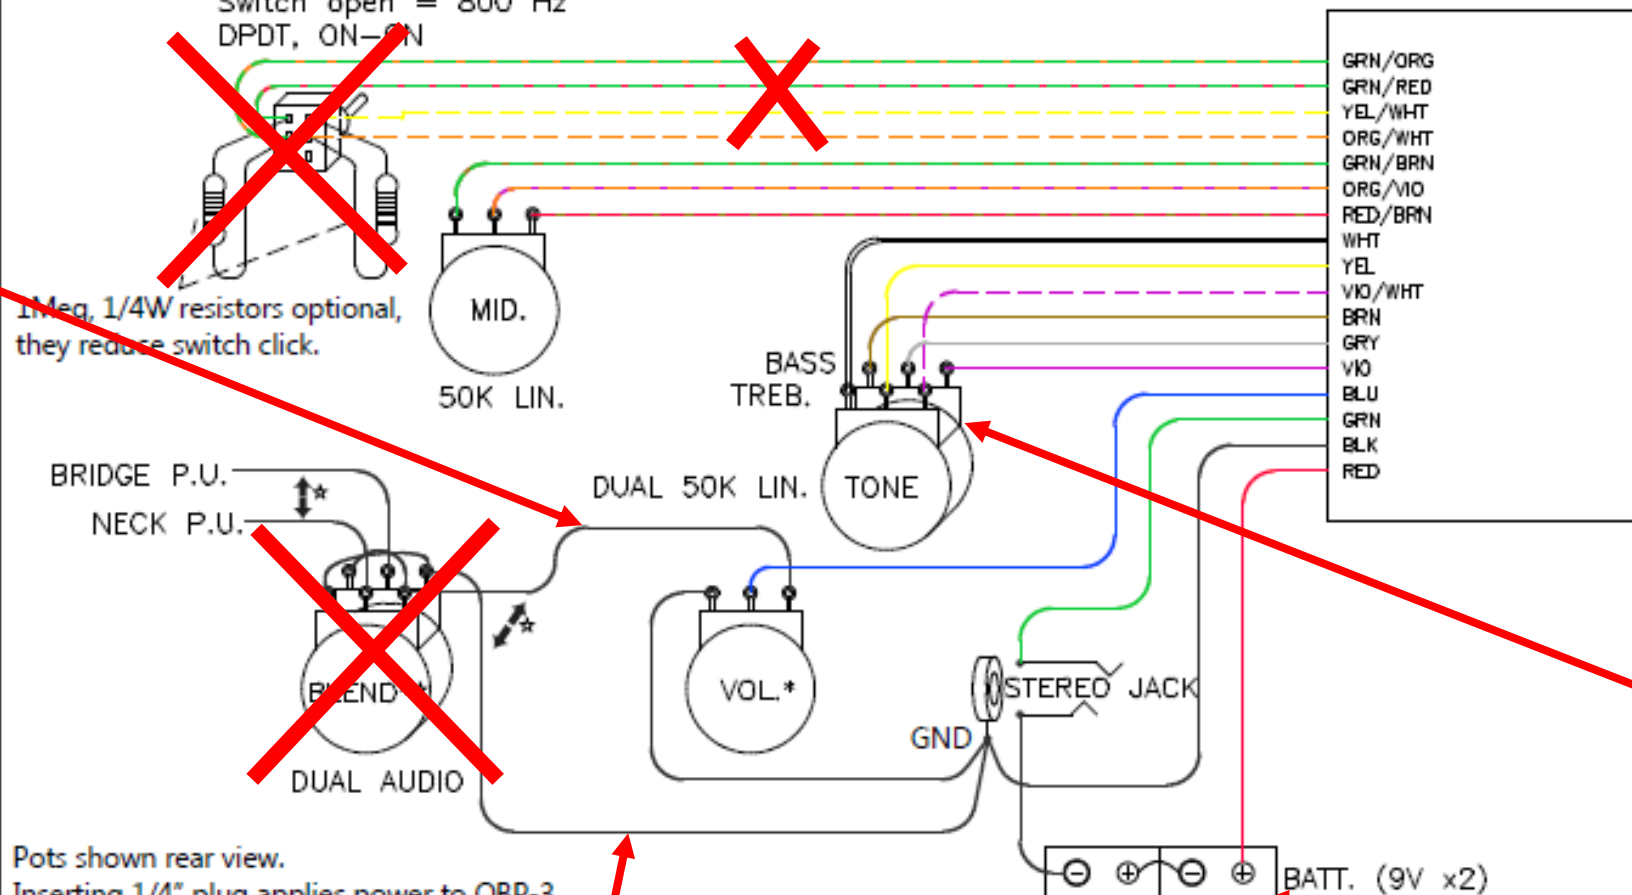

From Single
AG4M Pick
Up ?

My OBP-
3TK/PP I have
has 6 pins
plus 3 pins.

My bass has a
single 9volt
battery.

Connect to Bridge
piece ground wire ?

Pots shown rear view.

Inserting 1/4" plug applies power to OBP-3.

*Value depends on pickups. Use values recommended by pickup manufacturer.

*To wire MN (1Z2Z) taper potentiometer, swap positions of the following wires: Bridge P.U. and Neck P.U.; Volume jumper and GND. For single pickup, eliminate blend pot - wire pickup directly to volume pot.

MID.SELECT switch can be a stand alone switch or part of the push-pull potentiometer. Wiring is the same in both cases.