




AGUILAR OBP-3 WIRING DIAGRAM WITH BLEND, VOLUME CONTROL, AND BYPASS SWITCH

MID. SELECT
Switch closed = 400 Hz
Switch open = 800 Hz
DPDT, ON-ON

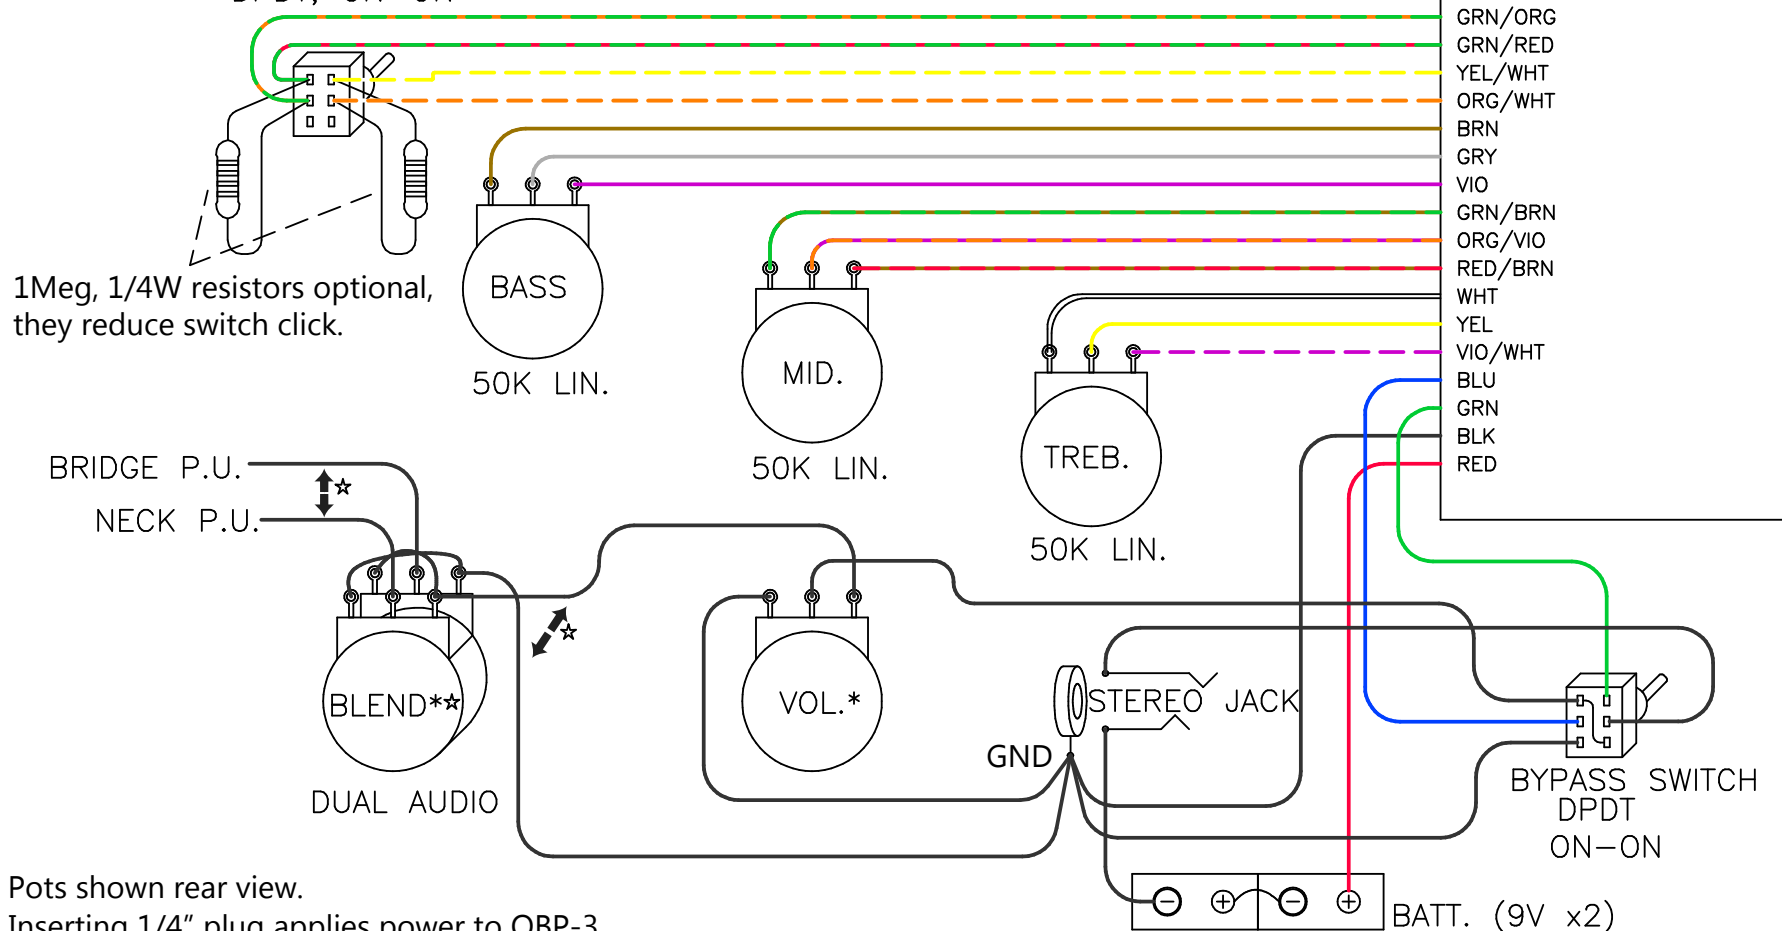

Pots shown rear view.

Inserting 1/4" plug applies power to OBP-3.

*Value depends on pickups. Use values recommended by pickup manufacturer.

**To wire MN (1Z2Z) taper potentiometer, swap positions of the following wires: Bridge P.U. and Neck P.U.; Volume jumper and GND.
For single pickup, eliminate blend pot - wire pickup directly to volume pot.

MID.SELECT switch can be a stand alone switch or part of the push-pull potentiometer. Wiring is the same in both cases.