




- NOTES
- ALL RESISTORS IN OHMS $\frac{1}{2}$ W, 10% UNLESS OTHERWISE SPECIFIED.
 - ALL CAPACITORS IN MFD. & 400V UNLESS OTHERWISE SPECIFIED.
 - DC VOLTAGE READINGS WITH NO SIGNAL APPLIED USING A 20000 Ω PER VOLT VOLTMETER.
 - NUMBERS IN PARENTHESIS REFER TO AMPEGS PART NO.
 - PARTS DESIGNATED BY * ARE IN 240V MODELS ONLY. THE P.T. FOR 240V MODELS HAS BLACK WIRE CONNECTED TO BLUE WH. WIRE.
 - DC VOLTAGE READINGS ARE POSITIVE WITH RESPECT TO CHASSIS GROUND UNLESS OTHERWISE SPECIFIED.
 - CIRCUIT OF CHASSIS MAY VARY SLIGHTLY FROM THAT SHOWN HERE DUE TO NORMAL PRODUCTION CHANGES.
 - D7-D8 ARE SILICON AX TYPE 1A, 1400V DIODES.

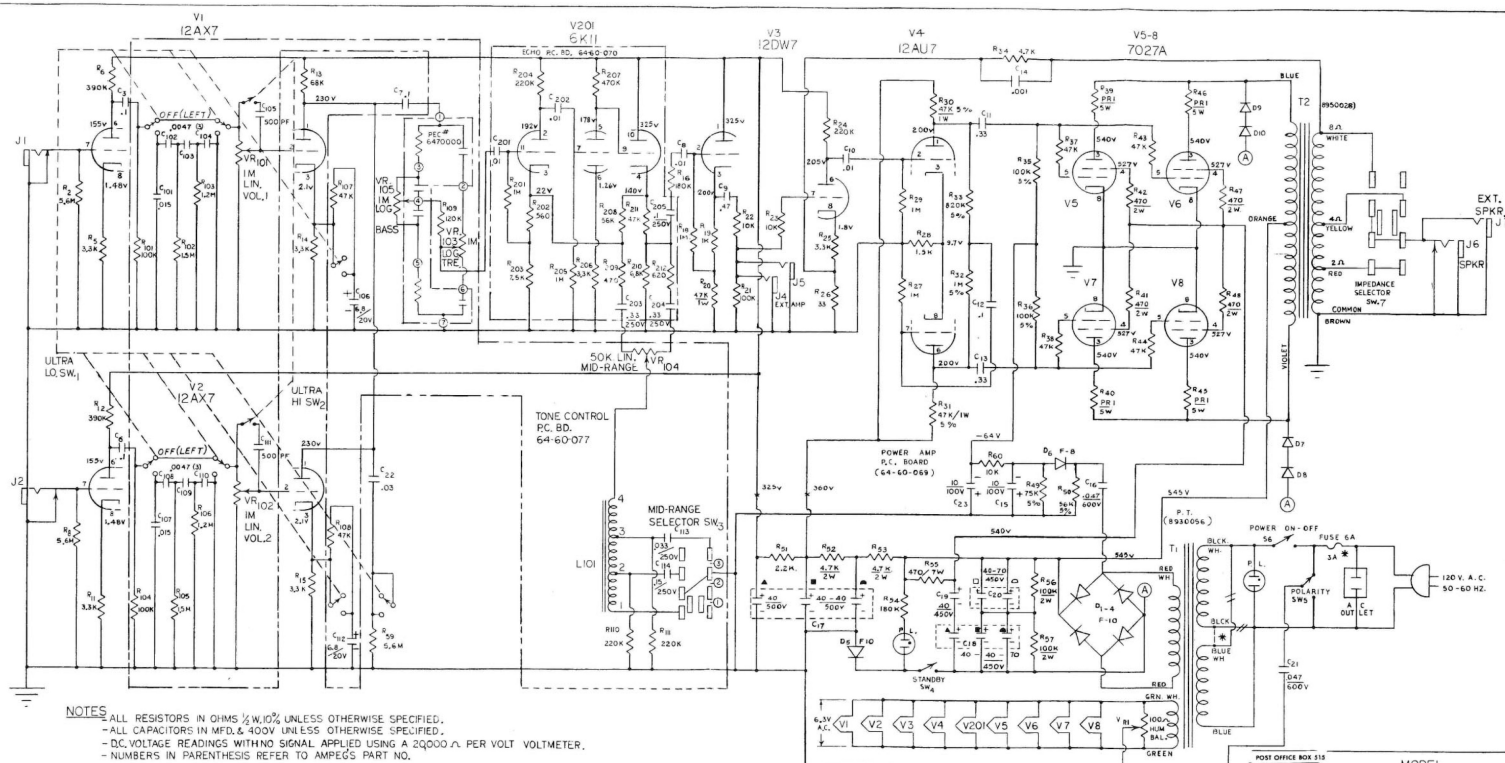

HOME OFFICE BOX 515

MODEL
V-4B

U.S. PATENT PENDING

DATE: 06/70 NO. 14010267 A